

## Strip-Stick®

### Tape-On Outside Corner Reinforcement

Strip-Stick® corner bead is a rigid, durable, vinyl corner bead designed for strong outside corners. Self-adhesive tape on the flanges allows for installation without fasteners or tools and allows for a period of limited adjustment to correct alignment mistakes. Vinyl is rust-proof and impact-resistant. It can be cut with scissors or snips and maintains its shape with no sharp edges or burrs when cut. All our vinyl products readily accept finish treatments such as paint and spray-on or roll-on textures.

Multiple perforations along the 1-1/4" flanges enhance joint compound bonding strength. The slight radius on the nose makes for easy, smooth finishing. The first finishing coat of joint compound can be applied immediately after the corner is installed; no drying time is required.

#### Product Data & Ordering Information:

Product code	Flange	Adhesive Width	Length	Pcs./Ctn.
Strip-Stick	1-1/4"	3/8"	8', 9', 10'	50


#### ASTM & Code Standards:

- ASTM C1047 - Standard Specification for Accessories for Gypsum Wallboard and Gypsum Veneer Base
- ASTM D1784 - Standard Specification for Rigid Poly Vinyl Chloride (PVC) Compounds and Chlorinated Poly Vinyl Chloride (CPVC) Compounds
- ASTM D3678 - Standard Specification for Rigid Poly Vinyl Chloride (PVC) Interior Profile Extrusions
- Installation: ASTM C840 - Standard Specification for Application and Finishing of Gypsum Board
- SDS & Product Certification Information is available at [www.clarkdietrich.com/SupportDocs](http://www.clarkdietrich.com/SupportDocs)


#### Storage:

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from the weather.

### 09.22.00 (Support for Plaster & Gypsum Board)

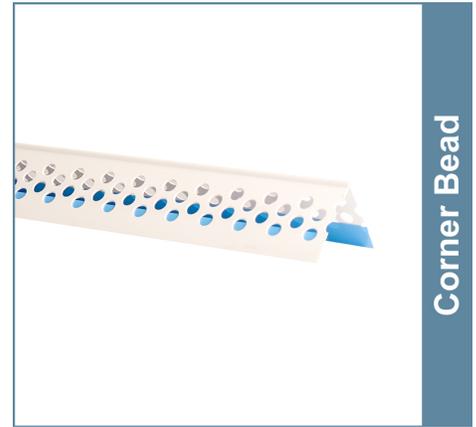

Corner Bead

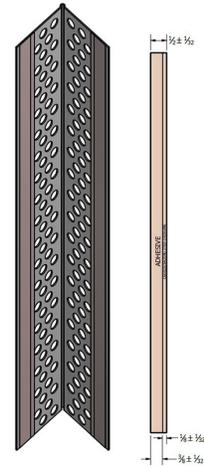

#### Sustainability Credits:

For more details and LEED letters contact Technical Services at 888-437-3244 or visit [www.clarkdietrich.com/LEED](http://www.clarkdietrich.com/LEED)

**LEED v4 MR Credit** -- Building Product Disclosure and Optimization: EPD (1 point) - Sourcing of Raw Materials (1 point) - Material Ingredients (1 point) - Construction and Demolition Waste Management (up to 2 points) - Innovation Credit (up to 2 points).

**LEED 2009 Credit MR 2 & MR 4** -- ClarkDietrich's steel products are 100% recyclable and have a national average recycled content of 34.2% (19.8% post-consumer and 14.4% pre-consumer). If seeking a higher number to meet Credit MR 5, please contact us at ([info@clarkdietrich.com](mailto:info@clarkdietrich.com) / 888-437-3244)

#### Project Information

Name:  
Address:

#### Contractor Information

Name:  
Contact:  
Phone:  
Fax:

#### Architect Information

Name:  
Contact:  
Phone:  
Fax: